

# FIG. 1

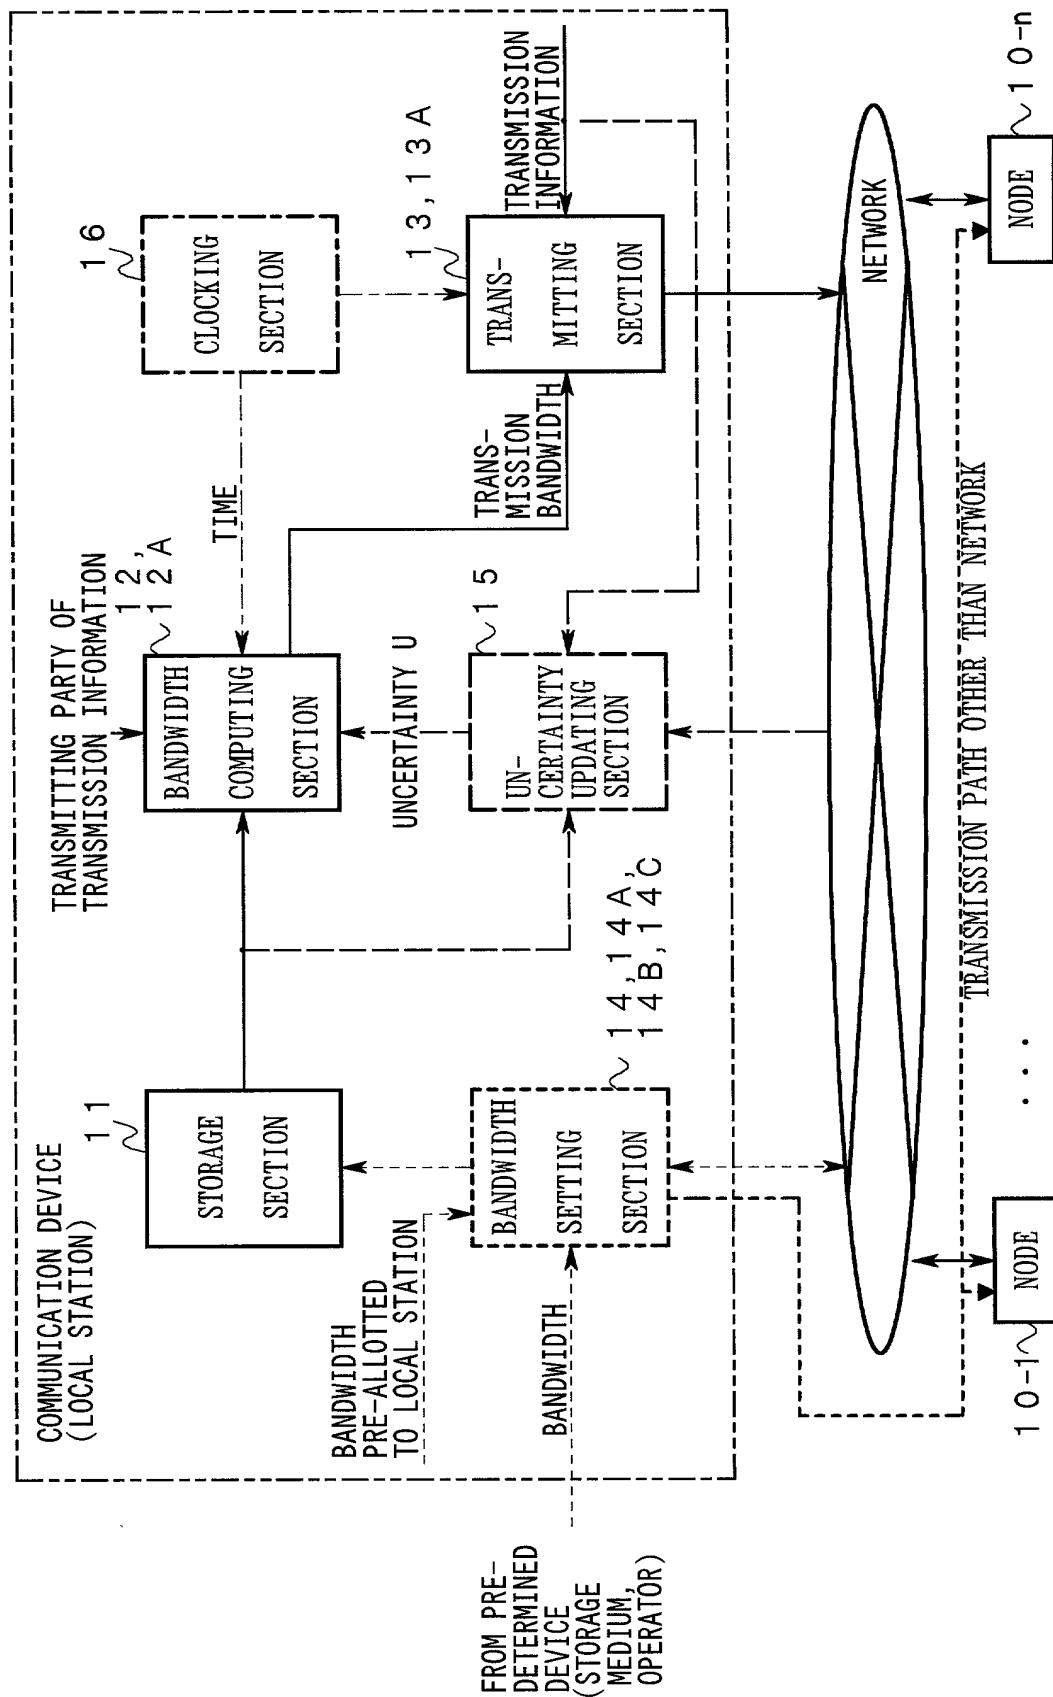




FIG. 2

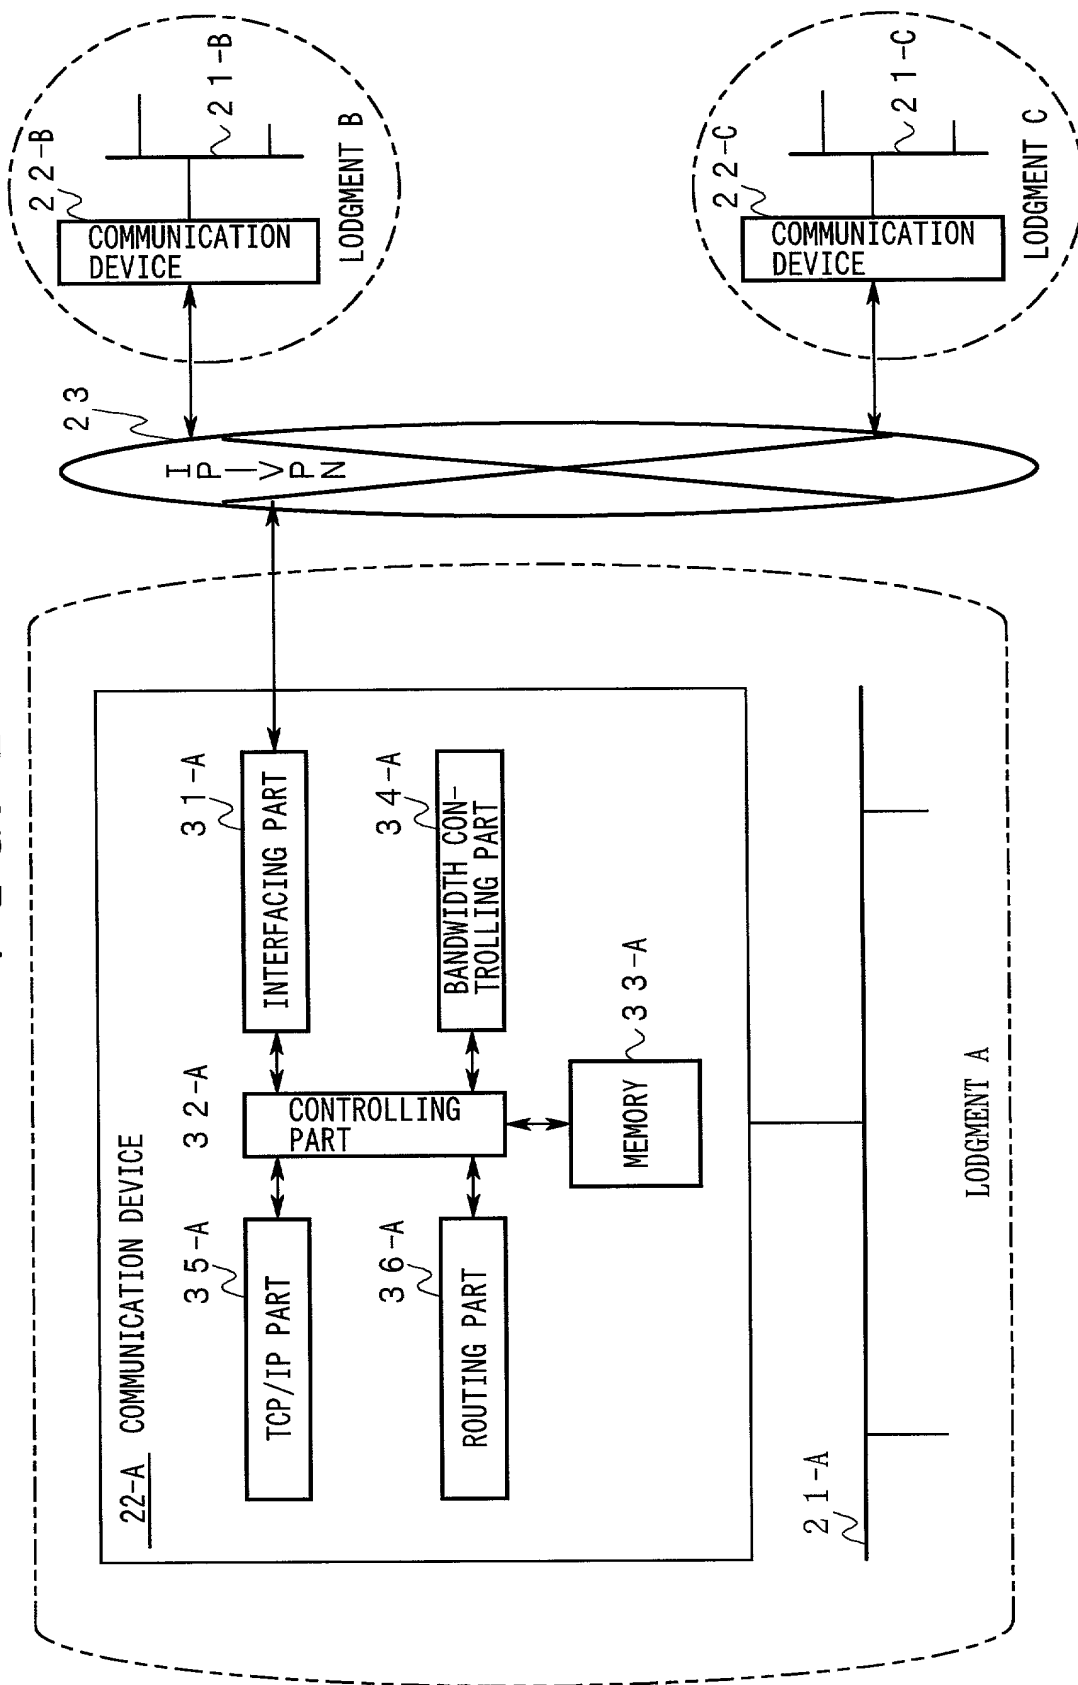




FIG. 3

COMMUNICATION DEVICE IDENTIFIER	CONTRACTED BANDWIDTH(Mbps)
A	3 (= B W <sub>A</sub> )
B	1 (= B W <sub>B</sub> )
C	2 (= B W <sub>C</sub> )
⋮	⋮

37-A~37-C




FIG. 4

TRANSMITTING/RECEIVING END IDENTIFIER		COMPUTED BANDWIDTH (Mbps)
TRANSMITTING PARTY	DESTINATION	
A	B	0.6
	C	1.5
B	A	1.0
	C	0.5
C	A	2.0
	B	0.4
⋮	⋮	⋮

38-A~38-C



FIG. 5

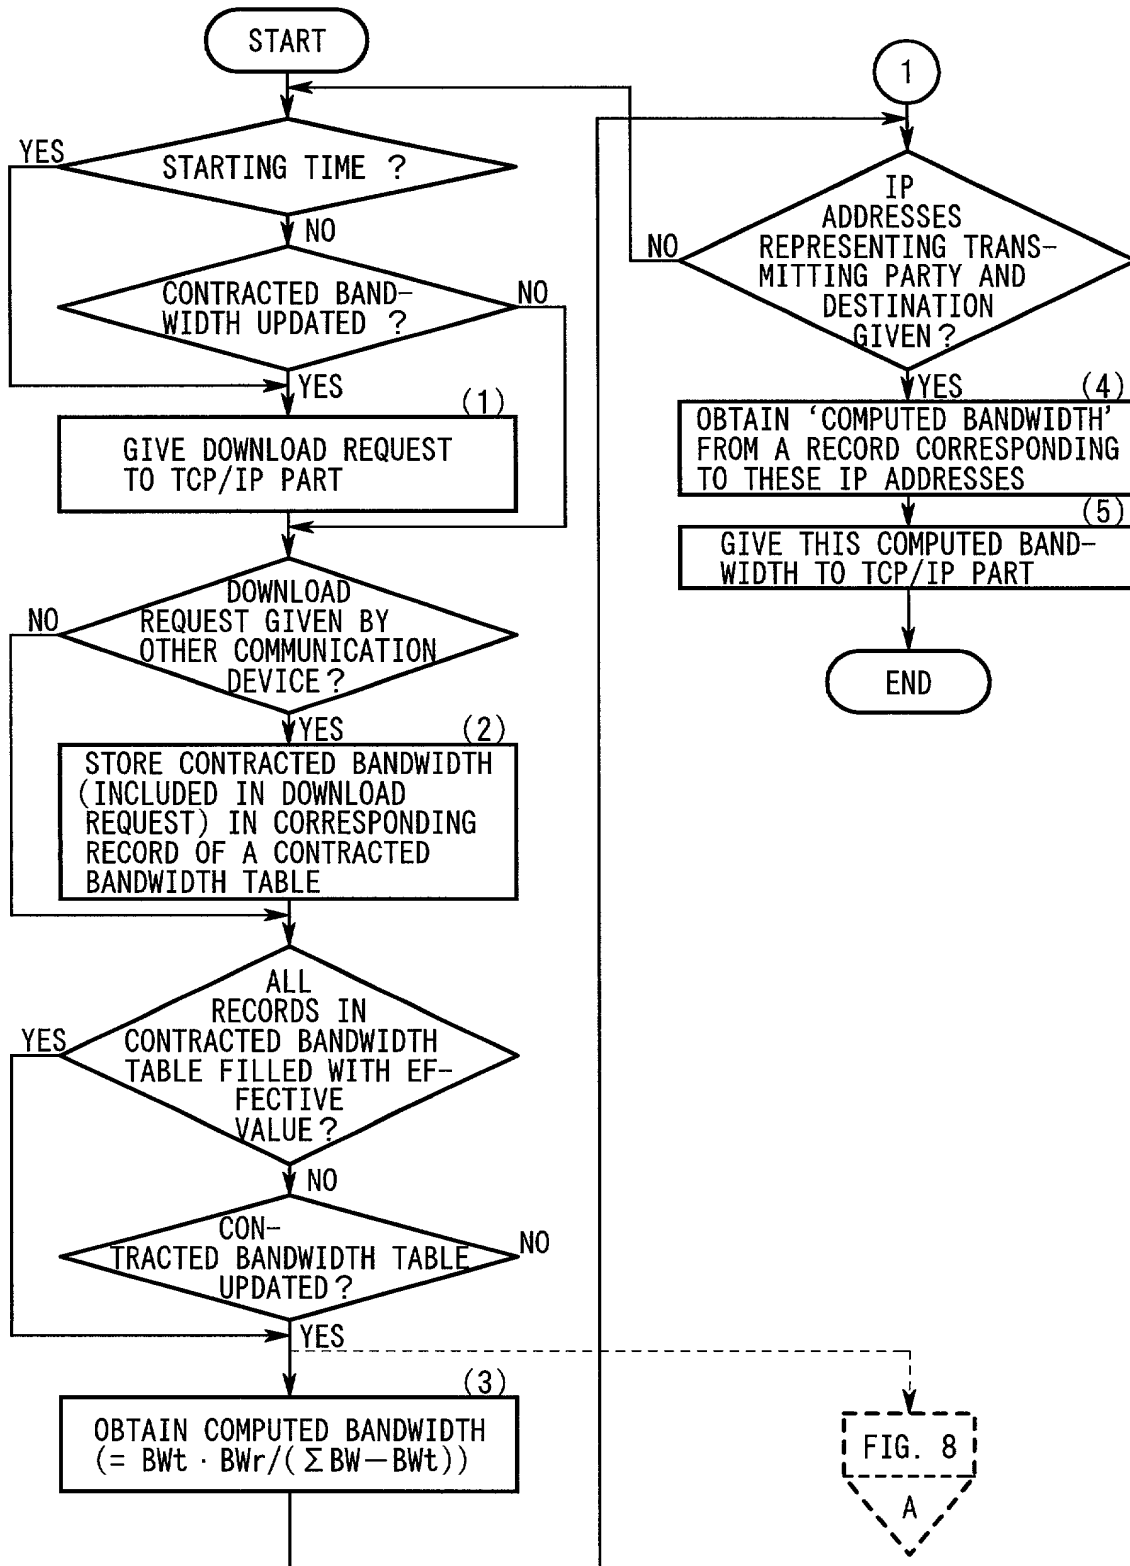



# FIG. 6

SOURCE USER PORT NUMBER (16 BITS)	DESTINATION PORT NUMBER (16 BITS)
UDP DATA LENGTH (16 BITS)	UDP CHECK SUM (16 BITS)
LODGMET ADDRESS (32 BITS)	
LODGMET SUBNET MASK (32 BITS)	
TRANSMISSION RATE (32 BITS)	
ABOVE THREE ITEMS ARE REPEATEDLY APPENDED IN INDICATED MESSAGE ACCORDING TO NUMBER OF ITEMS IN TABLE. . . .	




# FIG. 7

TRANSMITTING/RECEIVING END IDENTIFIER		COMPUTED BANDWIDTH (Mbps)
TRANSMITTING PARTY	DESTINATION	
A	B	1.0
	C	2.0
B	A	1.0
	C	0.0
C	A	2.0
	B	0.0
⋮	⋮	⋮

38-A~38-C



FIG. 8

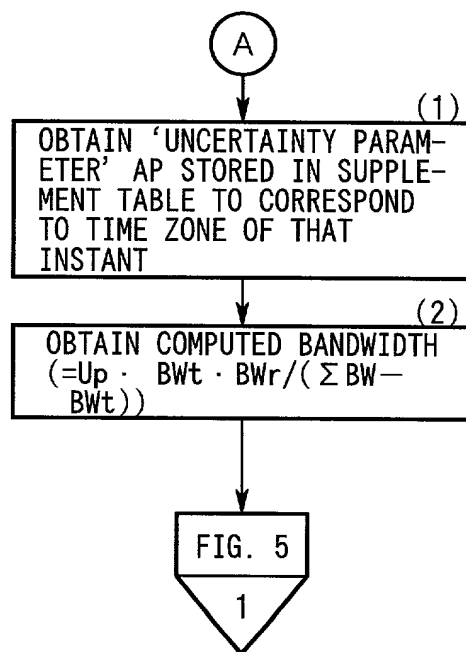



# FIG. 9

TIME ZONE P	UNCERTAINTY PARAMETER (UNCERTAINTY) AP
0:00~ 7:59	5 (=A1)
8:00~12:00	1.5 (=A2)
13:00~17:00	1 (=A3)
17:01~23:59	2 (=A4)

3 9-A~3 9-C



# FIG. 10

TRANSMITTING/RECEIVING END IDENTIFIER		COMPUTED BANDWIDTH (Mbps)
TRANSMITTING PARTY	DESTINATION	
A	B	0.9
	C	2.25
B	A	1.5
	C	0.9
C	A	3.0
	B	0.6
⋮	⋮	⋮

38-A~38-C